

VRLA Front Access 12 V Battery

OBS1290CT 12V 90Ah




The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/I-CAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.

Dimensions and Weight	
Length(mm / inch)	395 / 15.6
Width(mm / inch)	110 / 4.33
Height(mm / inch)	286 / 11.3
Total Height(mm / inch)	293 / 11.5
Approx. Weight(Kg / lbs)	30.5 / 67.2
*Weight deviation	± 3%

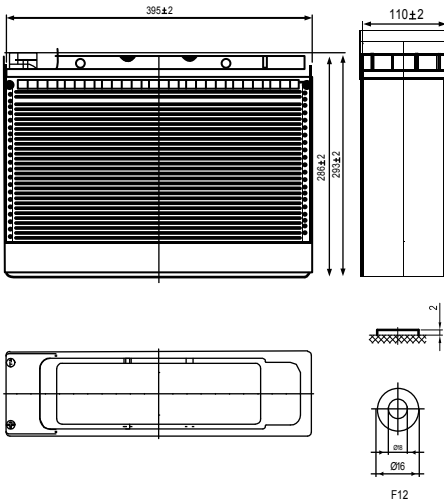

Battery Construction							
Component	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid









Performance Characteristics	
Nominal Voltage	12V
Number of cell	6
Design Life	10 years
Nominal Capacity 77°F(25°C)	
10 hour rate (90.0A, 10.8V)	90Ah
5 hour rate (15.8A, 10.5V)	79Ah
1 hour rate (58.1A, 9.6V)	58.1Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	≤7mOhms
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	900A(5s)
Short Circuit Current	2100A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.40-2.45VPC
Maximum charging current	27.0A
Temperature compensation	-30mV/°C
Standby use	2.20 - 2.30VPC
Temperature compensation	-20mV/°C

Discharge Constant Current (Amperes at 77°F25°C)									
End Point Volts/Cell	10min	15min	30min	1h	3h	5h	8h	10h	
1.60V	191	155	92.4	58.1	25.9	17.0	11.4	9.44	
1.65V	185	149	90.0	55.4	24.7	16.4	11.3	9.31	
1.70V	175	140	85.5	54.3	24.4	16.2	11.1	9.25	
1.75V	158	135	83.1	53.0	23.7	15.8	11.0	9.10	
1.80V	132	125	79.3	52.0	23.0	15.3	10.8	9.00	

Discharge Constant Power (Watts at 77°F25°C)								
End Point Volts/Cell	10min	15min	30min	1h	2h	3h	5h	8h
1.60V	337	277	180	112	65.6	49.6	32.8	22.4
1.65V	314	265	175	108	63.1	47.6	31.8	22.0
1.70V	289	253	169	105	62.0	47.2	31.4	21.9
1.75V	279	234	160	101	61.2	46.0	30.7	21.6
1.80V	260	215	155	96.5	60.3	44.7	30.0	21.3

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values. All data shall be changed without notice. Kenjitsu reserves the right to explain and update the information contained hereinto.

OBS1290CT 12V90Ah (10h)

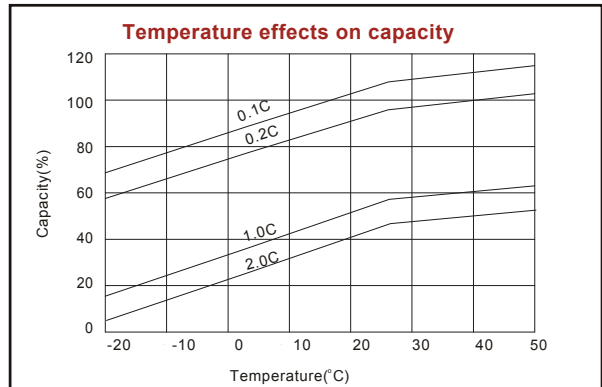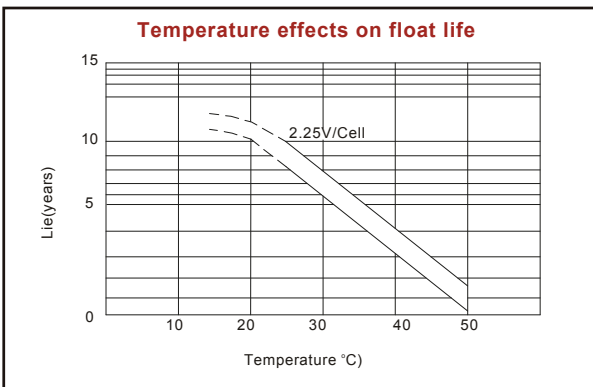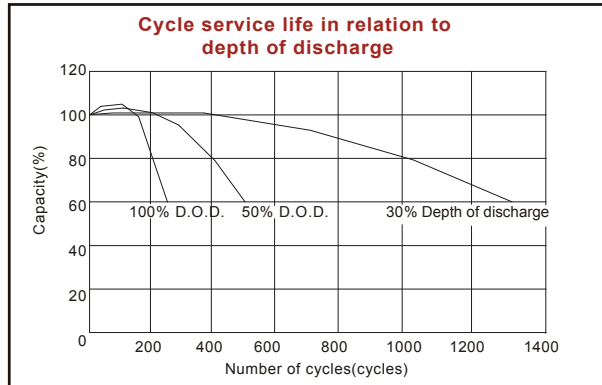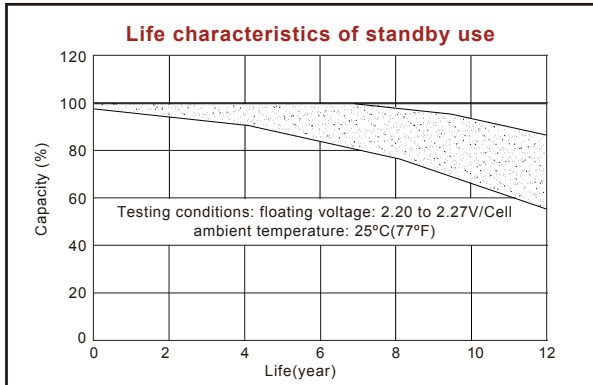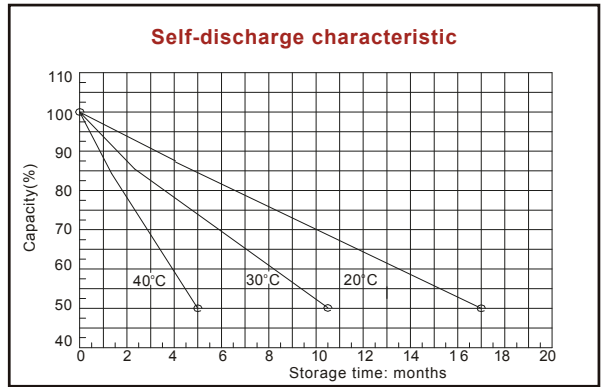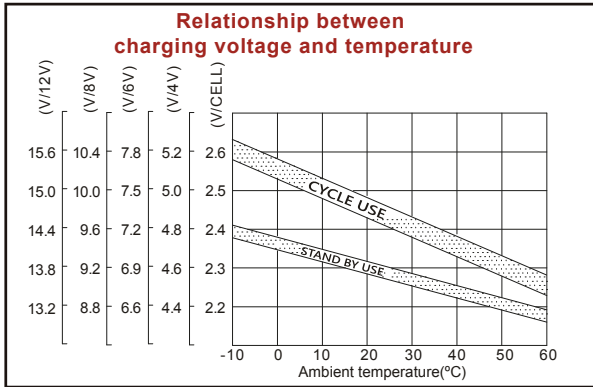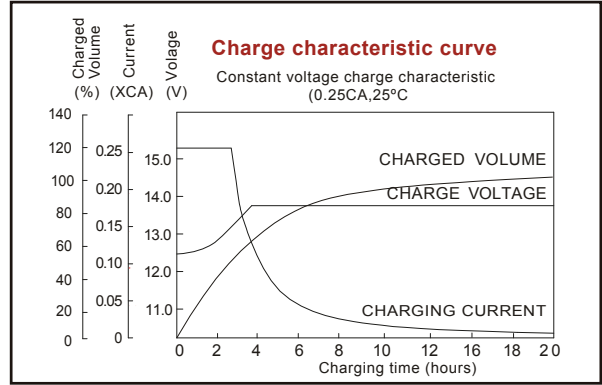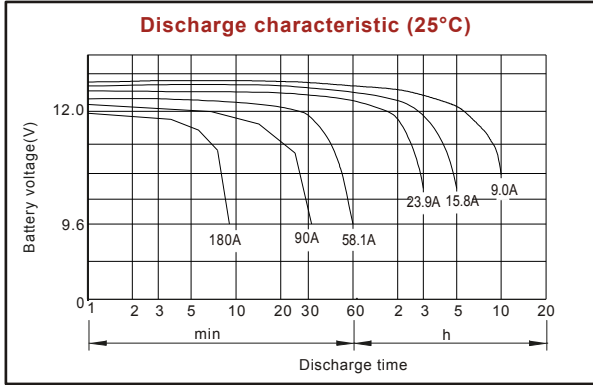

KENJITSU USA CORP.
 9830 Siempre Viva Road, STE 14, San Diego, CA92154, USA.
 sales@kenjitsuusa.com



www.kenjitsuusa.com